

OWL OQ35 Handheld Thermal Monocular Camera



HikMicro OQ35 handheld thermal monocular camera is equipped with a 384 × 288 infrared detector and a 1024 × 768 OLED display. It supports functions of observation, distance measurement, Wi-Fi hot spot, and so on. The high-sensitivity built-in thermal detector provides you with clear view even in total darkness. The monocular is mainly applied to scenarios such as patrolling, searching and rescuing, hiking, travel, and hunting, etc

Key Features

- High sensitivity thermal module with 640 x 512 resolution
- NETD < 35 mK (@25 °C,, F#=1.0)
- Leading thermal image processing technology: Adaptive AGC, DDE, 3D DNR
- 1024 x 768 resolution 0.39-inch OLED display
- Built-in rechargeable Li-ion battery
- Up to 5.5 hours continuous operation



Specification

•	Spe	cific	ation
---	-----	-------	-------


Thermal Module			
Image Sensor	VOx Uncooled Focal Plane Arrays		
Resolution	640 × 512		
Frame Frequency	50 Hz		
Pixel Interval	17 μm		
Response Waveband	8 μm to 14 μm		
NETD	Less than 35 mK (@25°C),F#=1.1		
Focal Length	35 mm		
IFOV	0.49 mrad		
Field of View	17.7° × 14.2° (H × V)		
Aperture	F1.0		
Magnification	1.4 - 11.2		
Image Display			
Monitor	0.39 inch, OLED, 1024 ×768		
Palettes	Black Hot, White Hot, Red Hot, Fusion		
Uniformity Correction	Auto, Manual, External Correction		
Digital Zoom	1× , 2× , 4 × , 8×		
Smart Function			
Hot Track	Yes		
Detection Range	1235 m		
System			
Storage	Built-in memory module (16 GB)		
Record Video	Yes		
Capture Snapshot	Yes		
Wi-Fi	Yes		
Standby Mode	Yes		
Power Supply			
Battery Type	Rechargeable Lithium Battery		
Battery Operating Time	5.5 hours continuous running with CVBS and Wi-Fi hot spot function off (@25 $^\circ$ C)		
battery operating time	4.5 hours continuous running with CVBS and Wi-Fi hot spot function on (@25 $^\circ$ C)		
Battery Capacity Display	Yes		
General			
Power	5 VDC/2 A, 2 W, Type-C Interface		
Work Temperature/Humidity	From -30°C to 55°C (-22°F to 131°F); Humidity: 90% or Less		
Protection Level	IP67		
Dimension	201.6 mm × 73.7 mm × 66 mm (7.94" × 2.90" × 2.60")		
Weight	500 g (0.55 lb)		



Available Model

HM-TS06-35XF/W-OQ35

Dimension

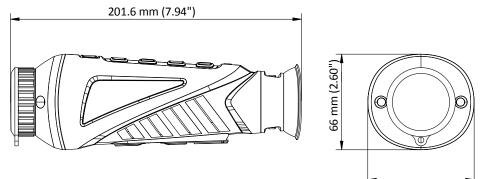

73.7 mm (2.90")

Accessory











Quick Start Guide (×1)

Non-dust Cloth (×1)

USB Cable (x1)

Protective Bag (×1)

Wrist Strap (x1)



Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang

© Hangzhou Microimage Software Co., Ltd. 2020 | Data subject to change without notice!